


EEN BACKUP VOOR NOODGEVALLEN

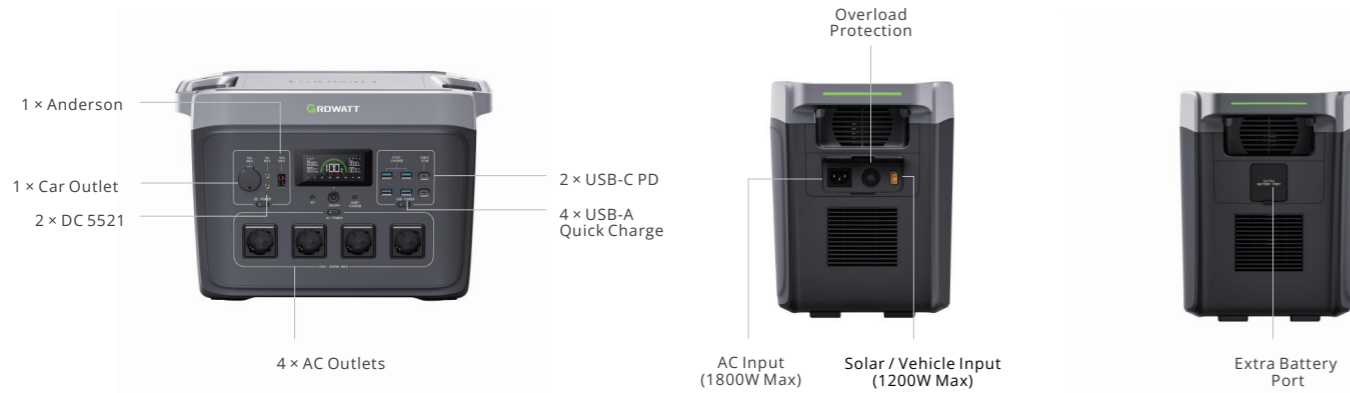

SPECIFICATIES

14 aansluit opties

MOGELIJKHEDEN	OMSCHRIJVING
Battery	
Capacity	2048Wh
Battery Chemistry	LiFePO4
Lifecycle	4000+ Cycles
Battery Management System	BMS: Over/Under Temperature Protection, Under/Over Voltage Protection, Over Charging Protection, Over Discharging Protection, Overload Protection, Short Circuit Protection
MPPT Efficiency	99%
Input	
AC Input	230V, 50/60Hz, 1800W Max.
Solar Input	1200W Max.
Vehicle Input	12-24V, 8A Max.
AC+PV Input	Max.2300W; Max. 3500W with one expansion battery; Max. 4000W with two expansion batteries
Output	
AC Outlet	230V 50Hz/60Hz, 2400w, Surge 4800w, 4x 230V outlets, Max. 2185W during pass-through status
Car Outlet	1 x 13.2V/10A, 132W Max.
DC 5521	2 x 13.2V/3A, 36W Max.
USB-A Quick Charge	4 x 5V/2.4A, 9V/2A, 12V/1.5A, 18W Max.
USB-C Output	2 x 5V/9V/12V/20V, 5A, 100W Max.
Anderson	1 x 13.2V, 30A
Advanced	
App Management	Yes (WiFi+Bluetooth)
OTA Function	Yes
Cold Startup	Yes, start from -30°C (-22°F)
Battery Expansion	Yes, up to 6144Wh
Combine Charge	AC+PV and EV+PV
EPS Feature	Yes
Smart PV Function	Yes
General	
Dimensions (LxWxH)	457*247*310mm (17.99*9.72*12.20 in.)
Weight	≈23kg (≈51lbs)
Discharge Temperature	-20°C~45°C / -4°F~113°F
Charge Temperature	0°C~45°C / 32°F~113°F
Optimal Operating Temperature	20°C~30°C / 68°F~86°F
Storage Temperature	-20°C~45°C / -4°F~113°F
Certifications	ETL, CE, LVD, FCC, IC, DOE, CEC, CA65, RoHS, REACH, WEEE, UKCA, RCM, SAA, ICASA, NRCS LOA, UN38.3
Warranty	5 years
EU&AU&UK	Input: 200V-240V 50/60Hz Output: 230V 50/60Hz

eVO | ENERGIE



- NIEUW IN NEDERLAND -

Evo Energie lanceert voor Nederland de

INFINITY 2000 PRO
PORTABLE POWER STATION

HEB JIJ JE AL VOORBEREID!?



Boost je vermogen voor extra lang gebruik!

Sluit 2 batterij packs aan en krijg een maximaal vermogen van 6,14kWh. En bovendien, beide packs kunnen onafhankelijk geladen en ontladen worden*



EPS - Noodstroom voorziening thuis of kantoor

De INFINITY 2000 PRO schakelt binnen 20ms om naar de noodstroom voorziening bij stroomuitval. Is de stroomvoorziening weer hersteld kan deze automatisch opstarten met laden van het net.



Koude start ondersteuning

Automatische opwarming om vlekkeloos te kunnen opereren zoals gebruikelijk tijdens koude. Werkt zelfs bij -30°C



De meest betrouwbare LFP batterij

Met de lange levensduur van deze LFP batterij kan de INFINITY 2000 PRO maar liefst 4000+ laad en ontlad cycli mee.



Ongelofelijk snelle laadsnelheid

Op het stroomnet aangesloten is de INFINITY 2000 PRO in 1,6 uur geladen gebruikmakend van de bi-directionele technologie.



Overall stroom tot je beschikking!



Power Beast dankzij Watt+ Feature

Evo Energie lanceert voor Nederland de INFINITY SERIES

Outdoor Adventures – Camperen, aan boord of in camper

Smartphone 11Wh/158 keer	Flashlight 10W/174Hrs	Bluetooth Speaker 20W/87Hrs	Light Bulb 30W/58Hrs	Laptop 60Wh/29 keer	Projector 300W/5.8Hrs	Electric Grill 600W/2.9Hrs	Room Heater 1800W/1Hr

Emergency Backup

WiFi Router 25W/69.6Hrs	Electric Fan 30W/58Hrs	TV 200W/8.7Hrs	Computer 150W/11.6Hrs	Blender 350W/5Hrs	Stereo 450W/3.9Hrs	Coffee Maker 1000W/1.8Hrs	Table Saw 1800W/1Hr

* Optie: Pack zal later 2025 worden geïntroduceerd